



LOVE your floors

TIER flooring is a statement in style and a step forward for livability in your indoor space. Now available in two quality SPC product ranges, TIER gives your home or business durable and long-lasting floors which look like wood but with the long-term performance features of Stone Polymer Composite. Choose from the TIER Classic range or the high performing TIER Element range with advanced digital printing to find what best suits your needs or project specifications.





RELIABLE SPC INDOOR FLOORING

TIER Classic flooring provides the beauty of wood in a Stone Polymer Composite (SPC) which is heat and water resistant, highly stable, VOC free, and offers an easy click installation system.







RESISTANT



HEAT **RESISTANT**



CLICK **INSTALLATION**



VOC FREE

DIVERSE APPLICATIONS


Beautiful in any home



TIER Classic indoor flooring is perfect for a range of installations. From bedrooms to bathrooms, kitchens to living areas, TIER Classic flooring will guarantee satisfaction with every application.

SPC INDOOR FLOORING

With CarbideCore technology

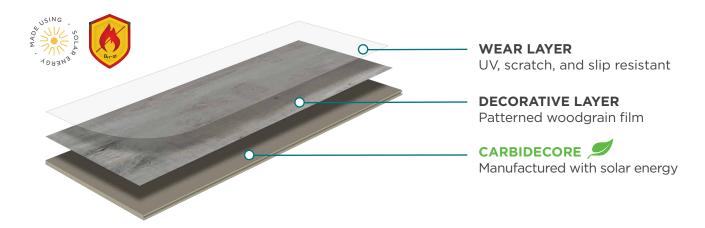

TIER Classic flooring offers an embossed wear layer, giving your floor a natural and tactile feeling. Anti-slip features and UV protection provide greater longevity, safety, and style.

PROFILE

TIER Classic is designed for versatility as well as durability. TIER Classic is a 4.3 mm profile which consists of a 4 mm CarbideCore and a 0.3 mm wear layer. This offers an AC3 wear rating, ideal for residential applications, with a 25-year warranty.


4.3 mm


181 mm

2G CLICK SYSTEM

2G Angling technology offers a strong, robust, and reliable method for installing flooring. This type of click system involves angling flooring panels to engage the locking mechanism. This results in sturdy and dependable horizontal locking, preventing gaps between planks, as well as vertical locking which ensures no unwanted height differences across the floor.





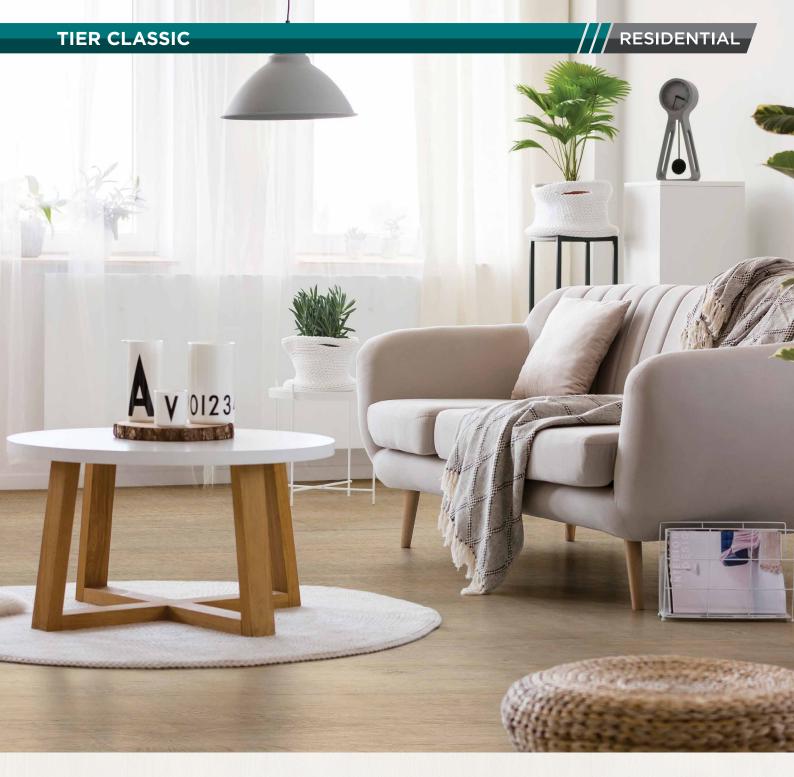

SPECIFICATIONS AND WARRANTY

TIER CLASSIC RESIDENTIAL SPECIFICATIONS

Total thickness	Dimensions		Boards per box
4.30 mm	181 x 1 220 mm		10
Wear layer thickness	Core thickness		Mass per board
0.30 mm	4.00 mm		1.95 kg
m² per board		m² per box	
0.22 m ²		2.21 m ²	
Wear layer type		Click system	
Engineered polymer		2G Groove	

WARRANTY CLASS

Domestic



Abrasion class*

AC3

Use class**

23

*As defined in BS EN 13329 **As defined in BS EN ISO 10582






RELIABLE, DURABLE SPC FLOORING

This TIER Classic commercial offering, will be available to order, specifically for large commercial projects where the cost of the digital range is a limitation to winning the project. It will also be recommended to sell this product into Africa, where we know the sub-floors are often do not meet the standard required.

SPC INDOOR FLOORING

With CarbideCore technology

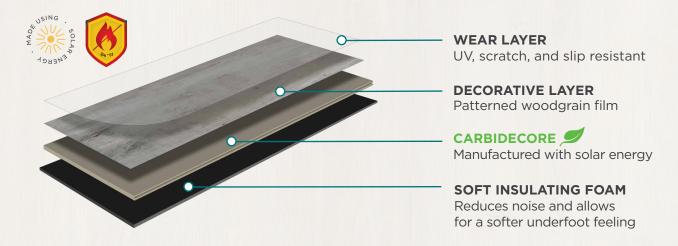


TIER Classic commercial flooring offers an embossed wear layer, giving your floor a natural and tactile feeling. Anti-slip features and UV protection provide greater longevity, safety, and style. Together with a insulating and noise reducing underlay for a softer feeling underfoot.

PROFILE

TIER Classic commercial profile has a 5,5mm core with a 0,5mm wear layer and a 1,0mm IXPE layer. An AC4 wear rating, this product is suitable for both commercial (5 year warranty) and residential (25 year warranty).

2G CLICK SYSTEM

2G Angling technology offers a strong, robust, and reliable method for installing flooring. This type of click system involves angling flooring panels to engage the locking mechanism. This results in sturdy and dependable horizontal locking, preventing gaps between planks, as well as vertical locking which ensures no unwanted height differences across the floor.



SPECIFICATIONS AND WARRANTY

CLASSIC COMMERCIAL SPECIFICATIONS		WARRANTY CLASS			
Total thickness	Dimensions	Boards per box	Commercial	Domestic	
7.00 mm	181 x 1 220 mm	8	5	25 YEAR	
Underlay thickness	Core thickness	Mass per board	YEAR		
1.00 mm	5.50 mm	2.94 kg	WARRANTY	WARRANTY	
Wear layer thickness	m² per board	m² per box	Abrasion class*	Abrasion class*	
0.50 mm	0.22 m ²	1,767 m²	AC4	AC4	
Wear layer type	Click system		Use class**	Use class**	
Engineered polymer	2G Groove		32	32	
			*As defined in BS EN 13329	**As defined in BS EN ISO 10582	



TIER CLASSIC COLOUR RANGE



NOTE: Due to printing and/or screen variations, colours in this brochure may differ from the actual products. Physical samples will be sent for colour finalisation.





LUXURY SPC INDOOR FLOORING

TIER Element luxury flooring provides the beauty of wood with advanced digital print technology and EIR surface embossing in a thicker, more durable Stone Plastic Composite (SPC) profile which is heat and water resistant, highly stable, VOC free, and offers sound suppression and an easy click installation system.







SOUND SUPPRESSION



WATER RESISTANT



CLICK INSTALLATION

DIVERSE APPLICATIONS


Beautiful in any home, office or commercial setting



TIER Element indoor flooring is designed for versatility as well as durability. TIER Element can be applied to any room in your residential or commercial space. Let the low-maintenance and high-performance features of the TIER Element range enhance the look and functionality of your home or business.

LUXURY SPC INDOOR FLOORING

With CarbideCore technology

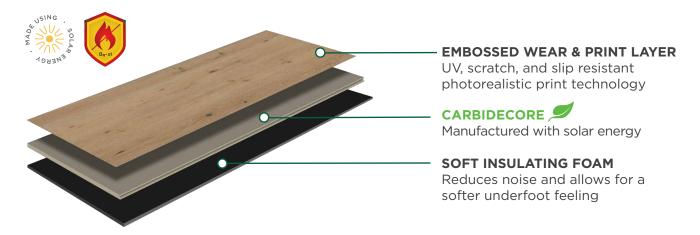

TIER Element flooring offers cutting-edge EIR embossing with advanced digital photo-realistic print technology in a 6.5 mm profile, giving your floor a more natural look and embossing that mirrors the timber grain and pattern. Anti-slip and UV protection provide greater longevity, safety, and style.


PROFILE

TIER Element is a 6.5 mm profile comprised of a 5.35 mm CarbideCore with a 0.15 mm wear coating and print layer. This is combined with a 1 mm IXPE layer. With an AC4 wear rating, this product is suitable for use in both residential and commercial applications.

2G CLICK SYSTEM

2G Angling technology offers a strong, robust, and reliable method for installing flooring. This type of click system involves angling flooring panels to engage the locking mechanism. This results in sturdy and dependable horizontal locking, preventing gaps between planks, as well as vertical locking which ensures no unwanted height differences across the floor.



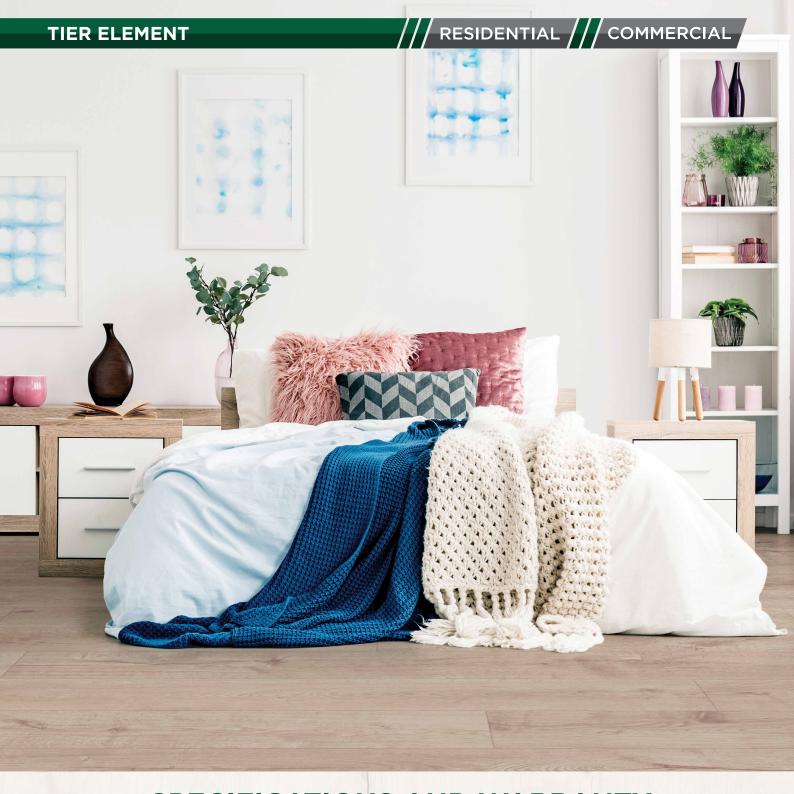

SPECIFICATIONS AND WARRANTY

TIER ELEMENT SPECIFICATIONS				
Total thickness	Dimensions Boards per b			
6.50 mm	181 x 1 520 mm	7		
Underlay thickness	Core thickness	Mass per board		
1.00 mm	5,35 mm	3.42 kg		
Wear coating thickness	m² per board	m² per box		
0.15 mm	0.27 m ²	1.93 m ²		
Click system				
	2G Groove			

WARRANTY CLASS

Commercial



Domestic




Abrasion class*	Abrasion class*	
AC4	AC4	
Use class**	Use class**	
33	33	


*As defined in BS EN 13329 **As defined in BS EN ISO 10582



COLOUR RANGE

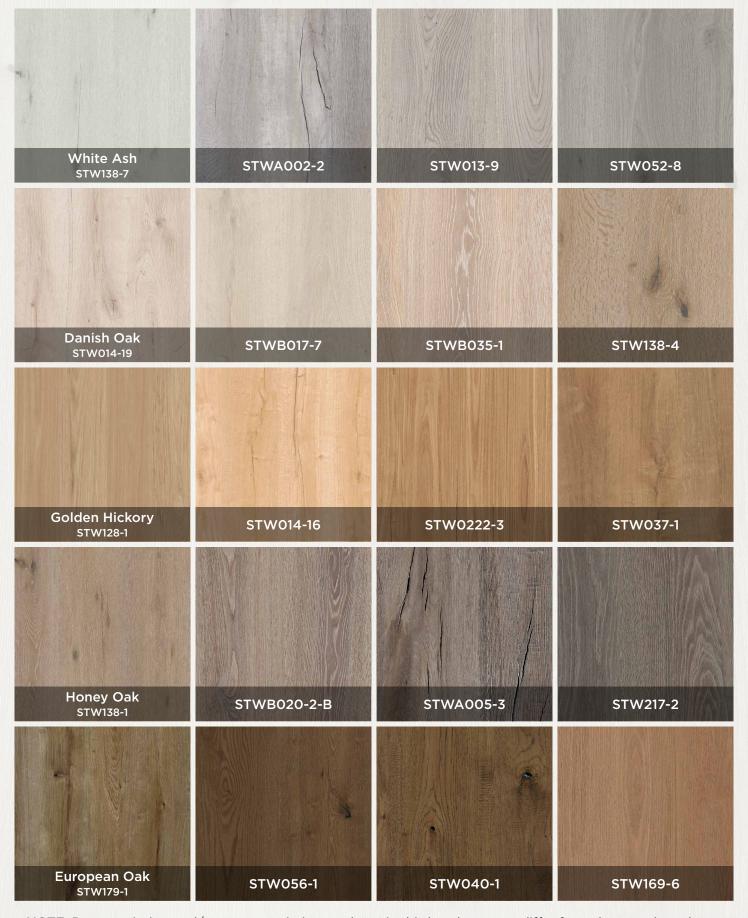

NOTE: Due to printing and/or screen variations, colours in this brochure may differ from the actual products. Physical samples will be sent for colour finalisation.

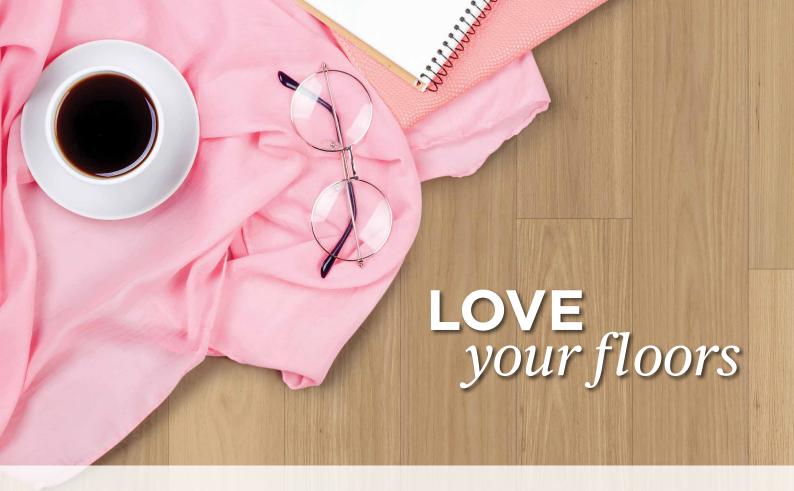

Choose quality alternatives to timber that improve your lifestyle and the environment.

TIER is setting the benchmark for eco flooring and green manufacturing processes. TIER high performance products are created using solar energy and are an ultra-low maintenance, water resistant alternative to timber. With TIER indoor flooring you make a positive impact on your home and the Earth.



MADE WITH SOLAR ENERGY

TIER flooring is manufactured using solar power. This greatly reduces its carbon footprint to help protect the Earth and bring you peace of mind.



EUROCLASS B_{fl} - s1 FIRE RATED

TIER flooring is Euroclass B_{fl} - s1 fire rated, making it a safer and more reliable product for your indoor application.



Forest Stewardship Council (FSC) certification ensures that products come from responsibly managed forests that provide environmental, social and economic benefits. The diverse fauna and flora who share our forests are given the time and space to recover from our use FSC of their environments.











www.tierflooring.com

E-mail: marketing@eva-last.com

Eva-Last reserves the rights to all brands, products and trademarks within this publication. TIER INT BROCHURE 0923 V1

responsible for ANY damage or liability that result from the use (or misuse) of the information. In the event that an error does occur, we reserve the right to correct, or make changes to, this information at any time.